


**OPERATING NOTES:**

- Read Operating Instructions Before Use
- Open and Close Slowly
- Maximum Operating Pressure:  
200 psi (14 bar)

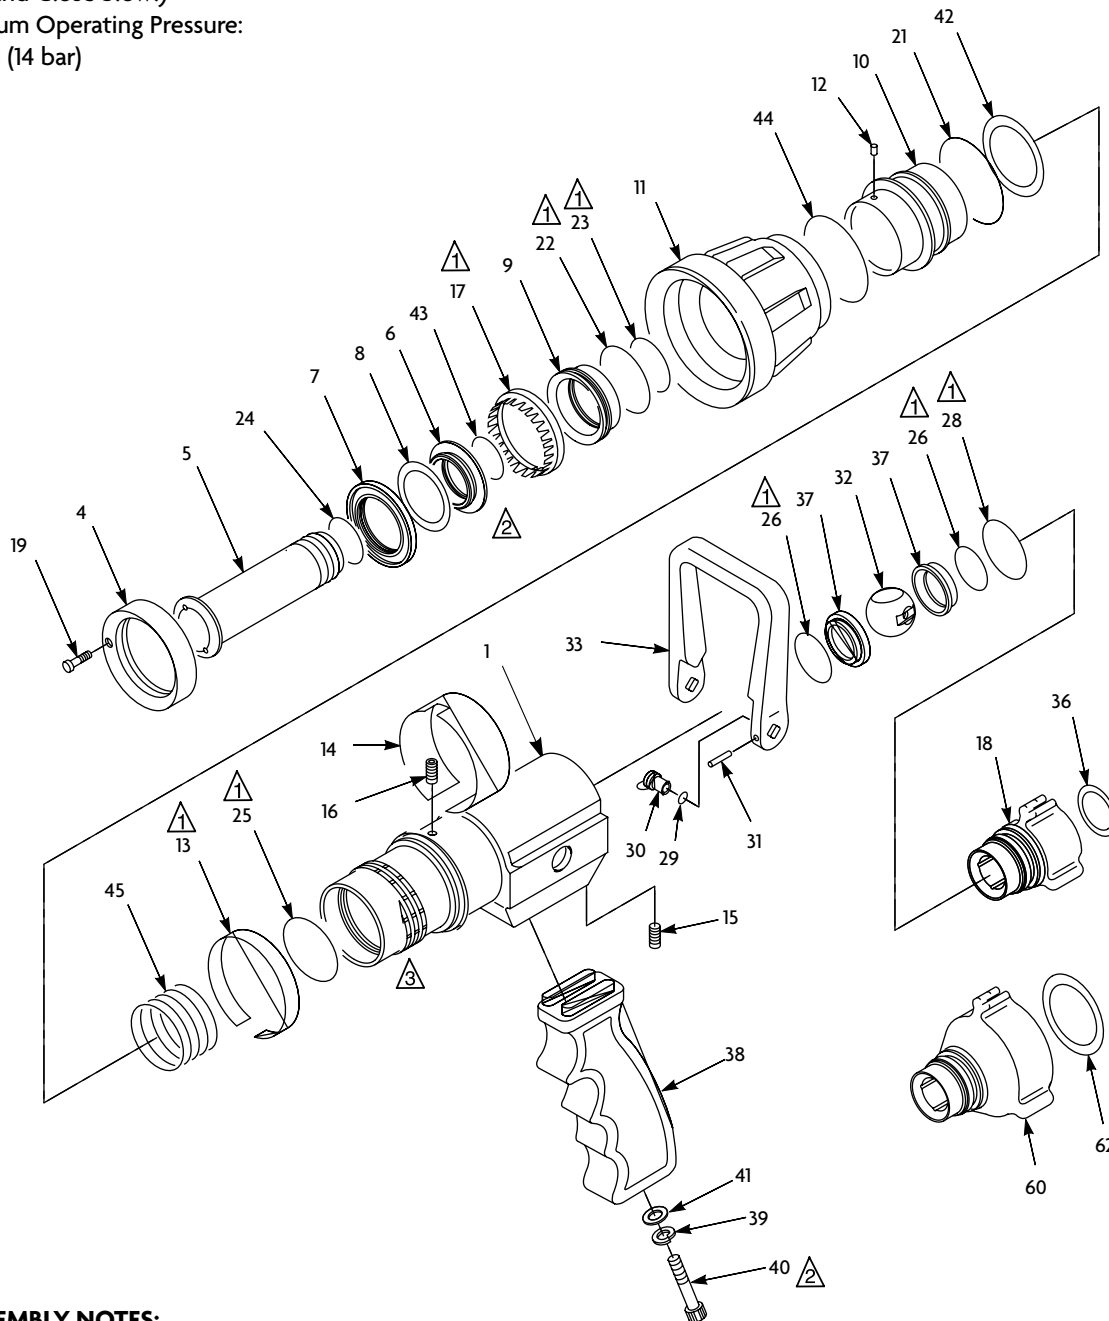

**ASSEMBLY NOTES:**

- ① Use Parker O-Ring Lubricant or equivalent petroleum based lubricant
- ② Use Loctite 222 or PermaBond LM 113
- ③ Use Low-Temp Lubriplate



# STYLES 1527 AND 1528 SABERJET™ NOZZLES TECHNICAL SERVICE PARTS LIST

ITEM NO.	DESCRIPTION	PART NUMBER	QUANTITY	
			1527	1528
1	Nozzle Body with Pistol Grip	119315		1
1	Nozzle Body	119316	1	
2†	Bumper Assembly	15220011	1	1
4	Turbine Retaining Ring	118047	1	1
5	11/8" Tip	119313	1	1
6	Baffle Head	119314	1	1
7	Gasket Retainer	118056	1	1
8	Baffle Gasket	717053	1	1
9	Throat Sleeve	118051	1	1
10	Throat	118048	1	1
12	Retaining Pin	744407	3	3
13	Pattern Band 1527	704738	1	
13	Pattern Band 1528	704739	1	
14	Indicator Band	704731	1	1
15	Socket Head Set Screw	765008	1	1
16	Socket Head Set Screw	765083	1	1
17*	Turbine Teeth	772160	1	1
18**	Swivel Assembly (2 1/2" NH)	15260006	1	1
18**	Swivel Assembly (1 1/2" NH)	15230017	1	1
19	Socket Head Cap Screw	765211	2	2
21	O-Ring	757322	1	1
22	O-Ring	757323	1	1
23	O-Ring	757246	1	1
24	O-Ring	757242	1	1
25	O-Ring	757400	1	1
26*	O-Ring	757268	2	2
28*	O-Ring	757265	1	1
29*	O-Ring	757269	2	2
30	Trunnion	107860	2	2
31*	Roll Pin	744062	2	2
32*	Ball	704651	1	1
33	Handle	721123	1	1
36*	Swivel Gasket 2 1/2"	717043	1	1
36*	Swivel Gasket 1 1/2"	717042	1	1
37*	Seat	769243	2	2
38	Pistol Grip	718138	1	
39	Lock Washer	784090	1	
40	Socket Head Cap Screw	763064		1
41	Flat Washer	784093	1	
42	Seal	768223	1	1
43	O-Ring	757401	1	1
44	O-Ring	757370	2	2
45	Spring	768316	1	1
Not Shown	Smooth Bore Label	704732	1	1

\* Parts included in Field Service Kit # 9182

\*\* For other threads order by description and thread size (ODM and TPI) or by Akron Thread Code

† A new pattern band item #13 is required



ISO 9001 REGISTERED COMPANY

PHONE: 330.264.5678 or 800.228.1161 | FAX: 330.264.2944 or 800.531.7335 | akronbrass.com

REVISED: 8/11

WARRANTY AND DISCLAIMER: We warrant Akron Brass products for a period of five (5) years after purchase against defects in materials or workmanship. Akron Brass will repair or replace product which fails to satisfy this warranty. Repair or replacement shall be at the discretion of Akron Brass. Products must be promptly returned to Akron Brass for warranty service.

We will not be responsible for: wear and tear; any improper installation, use, maintenance or storage; negligence of the owner or user; repair or modification after delivery; damage; failure to follow our instructions or recommendations; or anything else beyond our control. WE MAKE NO WARRANTIES, EXPRESS OR IMPLIED, OTHER THAN THOSE INCLUDED IN THIS WARRANTY STATEMENT, AND WE DISCLAIM ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. Further, we will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profits) from any cause whatsoever. No person has authority to change this warranty.

© Akron Brass Company. 2011 All rights reserved. No portion of this can be reproduced without the express written consent of Akron Brass Company.