


OBSOLETE

OPERATING INSTRUCTIONS:

- Flow Rating at 100 PSI (7 BAR)
- Open and Close Slowly
- Maximum Operating Pressure 200 PSI (14 BAR)

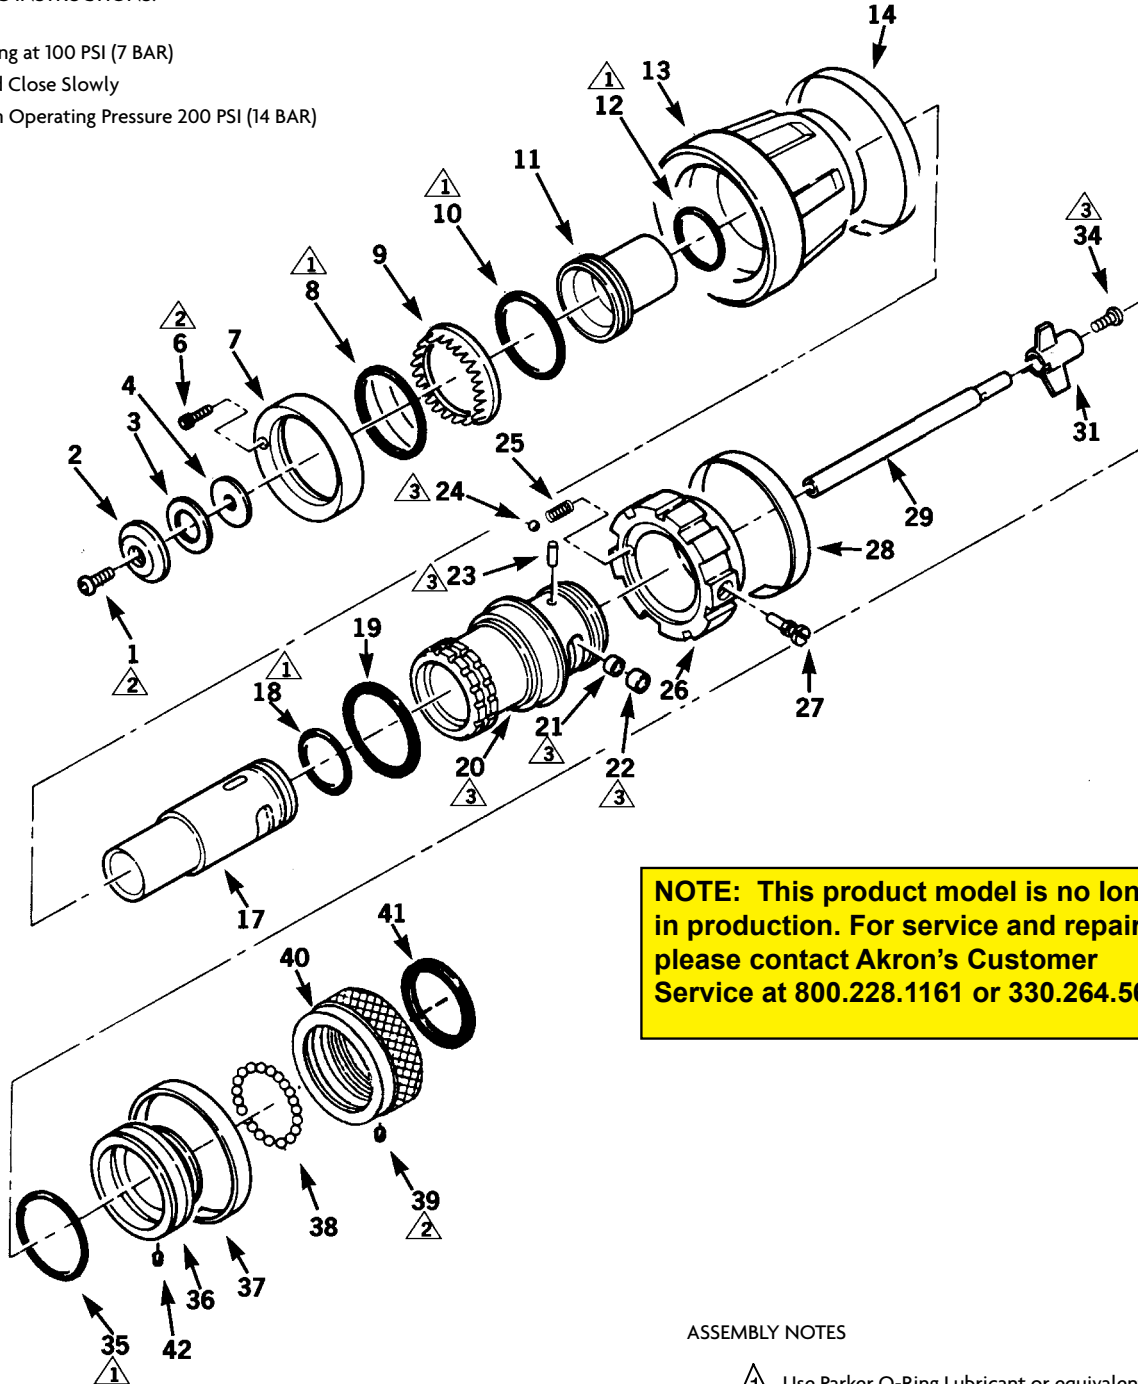

NOTE: This product model is no longer in production. For service and repair, please contact Akron's Customer Service at 800.228.1161 or 330.264.5678.

ASSEMBLY NOTES

- ① Use Parker O-Ring Lubricant or equivalent petroleum based lubricant
- ② Use Loctite 222 or Permabond 113
- ③ Use Low-Temp Lubriplate™



**STYLE 1717
Turbojet Tip
Manufactured Prior to June 2000**

OBSOLETE

ITEM NO.	DESCRIPTION	PART NUMBER	QUANTITY
1	Flat Head Screw	760040	1
2	Gasket Retainer	102232	1
3	Baffle Gasket	717046	1
4	Baffle Head	102231	1
6	Socket Head Cap Screw	767094	2
7	Turbine Retaining Ring	758183	1
8	O-Ring	757280	1
9	Turbine Teeth	772136	1
10	O-Ring	757244	1
11	Throat	102235	1
12	O-Ring	757245	1
13	Bumper Assembly	17150011	1
14	Pattern Indicating Band	704281	1
17	Discharge Tube	102234	1
18	O-Ring	757242	1
19	Seal	717042	1
20	Nozzle Body	102221	1
21	Cam Roller – Short	758210	1
22	Cam Roller – Long	758211	1
23	Key Pin	727034	1
24	Detent Ball	704018	1
25	Detent Spring	769111	1
26	Discharge Control Ring	758182	1
27	Cam Axle	707252	1
28	Discharge Control Band – GPM	704563	1
28	Discharge Control Band – LPM	704564	1
29	Stem	**	1
31	Spider	**	1
34	Socket Head Cap Screw	**	1
35	O-Ring	757232	1
36	Swivel Adapter	102233	1
37	I.D. Band	704285	1
38	Locking Balls	*	32
39	Set Screw	765008	1
40†	Swivel (NH)	108313	1
40†	Swivel (NPSH)	108314	1
41	Swivel Gasket	717042	1
42	For other threads of Set Screw description and thread size (ODM and TPI) or by Thread Code.	765040	1

*Packet of 50 Locking Balls - P/N 109042

**Parts not sold separately. Nozzle must be returned to factory for repair.



Tested – Proven – Trusted.

ISO 9001 REGISTERED COMPANY

PHONE: 330.264.5678 or 800.228.1161 | FAX: 330.264.2944 or 800.531.7335 | akronbrass.com

REVISED: 1/18

WARRANTY AND DISCLAIMER: We warrant Akron Brass products for a period of five (5) years after purchase against defects in materials or workmanship. Akron Brass will repair or replace product which fails to satisfy this warranty. Repair or replacement shall be at the discretion of Akron Brass. Products must be promptly returned to Akron Brass for warranty service.

We will not be responsible for: wear and tear; any improper installation, use, maintenance or storage; negligence of the owner or user; repair or modification after delivery; damage; failure to follow our instructions or recommendations; or anything else beyond our control. WE MAKE NO WARRANTIES, EXPRESS OR IMPLIED, OTHER THAN THOSE INCLUDED IN THIS WARRANTY STATEMENT, AND WE DISCLAIM ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. Further, we will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profits) from any cause whatsoever. No person has authority to change this warranty.

© Akron Brass Company. 2018 All rights reserved. No portion of this can be reproduced without the express written consent of Akron Brass Company.