




# *Performance guaranteed*

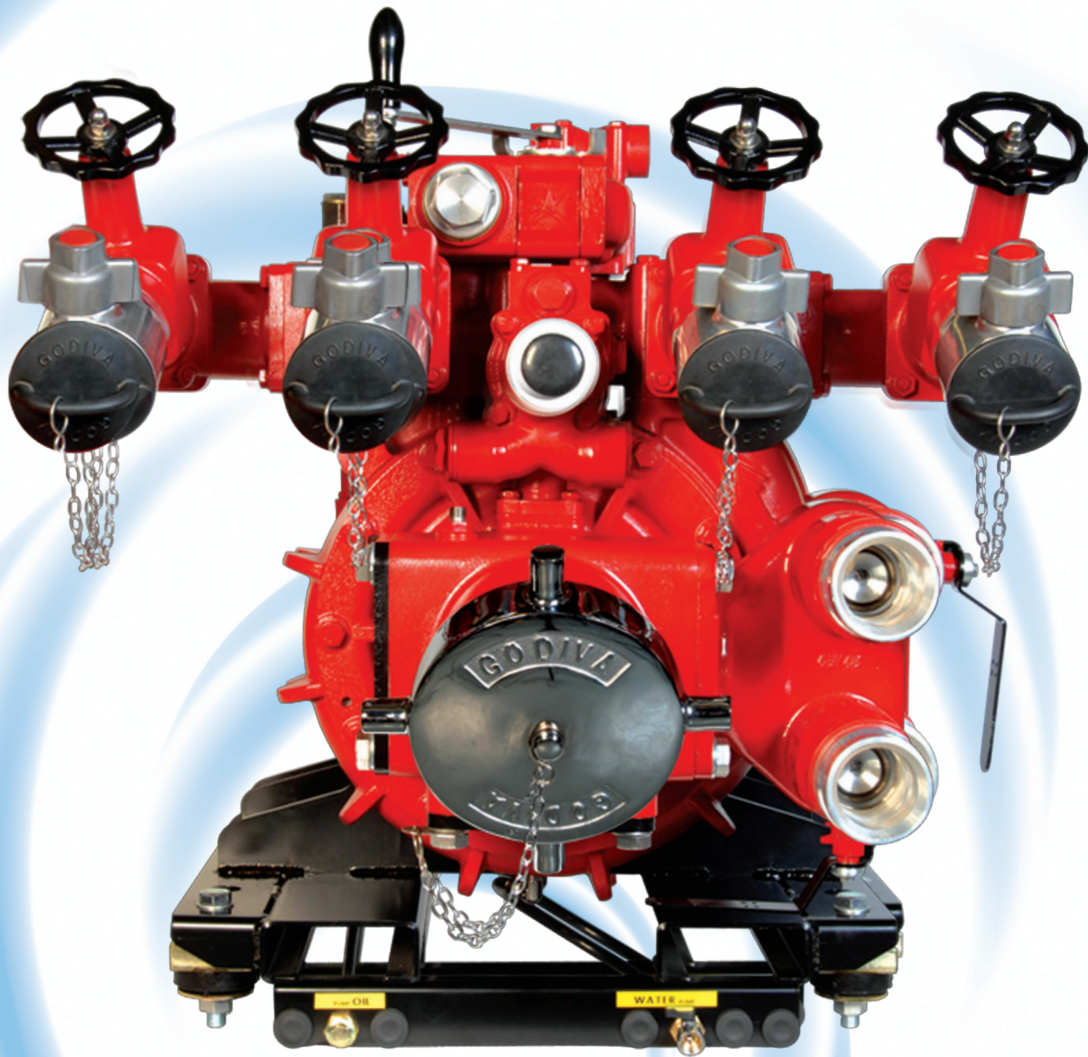

Compact, powerful and versatile the Prima vehicle mounted pump offers a range of flows and is available as a single or multi pressure pump for rear or midship mounting.

Also available in aluminium or bronze with a ready to use mounting platform for ease of installation.




- 30% smaller than comparable product – freeing up space for other equipment
- 8% lighter than comparable product – helping reduce fuel consumption
- Designed for ease of installation and maintenance to reduce total cost of ownership
- Conforms to EN1028 standards

Now available even faster through our **PRIMA SELECT** programme





# PRIMA SELECT

-  Reduced lead time
-  Better parts availability
-  Product simplification

Please ask about our Prima Select Programme.  
Contact us at [godivacustomerservice@idexcorp.com](mailto:godivacustomerservice@idexcorp.com)

Performance Data	2010	3010	4010	6010
Priming Performance Range	To 7.5m			
Priming Speed (recommended)	2500rpm			
Max. Suction Pressure	12 bar			
Max. Recommended Speed	3600 rpm			
Minimum idle speed	900 rpm			
Maximum Outlet Pressure – Low Pressure (EN compliance)	17 bar			
Maximum Outlet Pressure – High Pressure (EN compliance) *Multi pressure only	54.5 bar			
Max. Flow – Low Pressure	3400 l/min	4200 l/min	6200 l/min	7750 l/min
Max. Flow – High Pressure *Multi pressure only	770 l/min			
Weight (based on alum. model)	Single 85 kg	Single 92.5 kg	Single 125.5 kg	Single 125.5 kg
Approx. Weights, will vary according to specification and gunmetal spec	Multi 105 kg	Multi 117 kg	Multi 145.5 kg	Multi 145.5 kg
Typical Dimensions (L x W x H) mm	Single 714 x 580 x 626	Single 772 x 764 x 661	Single 772 x 764 x 661	Single 772 x 764 x 661
	Multi 740 x 580 x 787	Multi 806 x 770 x 790	Multi 806 x 770 x 825	Multi 806 x 770 x 825
EN1028 Priming Times from 7.5m	22 sec (4" hose)	32 sec (5½" hose)	32 sec (5½" hose)	68 sec (8" hose)
Thermal Relief Valve Activation	42°C or 74°C			

Basis of Data: P1/P2. 2010 with Piston Primer, 2 UK Delivery Valves, 4" RT suction. 3010/4010/6010 with Piston Primer, 4 UK Delivery Valves. 3010/4010. 5 ½" RT Suction, 6010 8" suction. Mounted on standard platform. For other applications please contact Godiva Ltd.

## EN1028:1 Rated performance

P1/P2_2010	P1/P2_3010	P1/P2_4010	P1/P2_6010
2000 L/min	3000 L/min	4000 L/min	6000 L/min
At 10 bar			
3m lift			
P2 only - High pressure rating 250 L/min at 40 bar			



© Godiva 2019. All rights reserved. This publication is issued to provide outline information only which, unless agreed in writing by Godiva, a division of IDEX Fire Suppression Group, may not be regarded as a representation relating to the products or services concerned. Godiva reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.